

Type 1/2 surge protection plug - VAL-MS-T1/T2 48/12.5 ST



2801242

<https://www.phoenixcontact.com/us/products/2801242>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.

L-N replacement plug for VAL-MS-T1/T2 48/12.5 plug-in lighting/surge arrester.



Your advantages

- Quality proven millions of times over in the widest range of applications
- Rapid installation with bridges, thanks to industry-standard overall width of 1 HP
- Easy testing and insulation measurement, thanks to pluggable protection modules
- Surge protection for (-) 48 V DC in lightning protection level III and IV due to discharge capacity of 12.5 kA per position
- Vibration-resistant latching ensures the plug remains firmly in place

Type 1/2 surge protection plug - VAL-MS-T1/T2 48/12. 5 ST



2801242

<https://www.phoenixcontact.com/us/products/2801242>

Commercial Data

Item number	2801242
Packing unit	1 pc
Minimum order quantity	1 pc
Sales Key	C06
Product Key	CL1151
Catalog Page	Page 48 (C-4-2019)
GTIN	4046356750196
Weight per Piece (including packing)	58.26 g
Weight per Piece (excluding packing)	52.4 g
Customs tariff number	85366990
Country of origin	DE

Type 1/2 surge protection plug - VAL-MS-T1/T2 48/12.5 ST



2801242

<https://www.phoenixcontact.com/us/products/2801242>

Technical Data

Product properties

IEC test classification	I / II
	T1 / T2
EN type	T1 / T2
IEC power supply system	TN-C
Type	Male
Product type	Replacement plug
Surge protection fault message	optical

Insulation characteristics

Overvoltage category	III
Pollution degree	2


Electrical properties

Nominal frequency f_N	50 Hz (60 Hz)
Nominal voltage U_N	60 V AC
	60 V DC
	- 48 V DC (RRH)

Connection data

Connection method	pluggable
-------------------	-----------

Dimensions

Dimensional drawing	
Width	17.5 mm
Width	17.5 mm
Height	47 mm
Height	47 mm
Depth	67.3 mm
Depth	67.3 mm
Horizontal pitch	1 Div.

Material specifications

Color	jet black RAL 9005
Flammability rating according to UL 94	V-0
CTI value of material	600
Insulating material	PA 6.6/PBT
Material group	I

Type 1/2 surge protection plug - VAL-MS-T1/T2 48/12.5 ST



2801242

<https://www.phoenixcontact.com/us/products/2801242>

Housing material	PA 6.6
	PBT

Protective circuit

Mode of protection	L-N
	N-PE
	(L+) - (L-)
	(L+) - PE
Direction of action	L-N / L-PEN
Nominal voltage U_N	60 V AC $\pm 10\%$ (TN)
Nominal voltage U_N	60 V DC $\pm 10\%$
	-48 V DC $\pm 10\%$ (RRH)
Nominal frequency f_N	50 Hz (60 Hz)
Maximum continuous voltage U_C	75 V AC
	100 V DC
Residual current I_{PE}	≤ 0.6 mA
Standby power consumption P_C	≤ 45 mVA
Nominal discharge current I_n (8/20) μ s	12.5 kA
Maximum discharge current I_{max} (8/20) μ s	30 kA
Impulse discharge current (10/350) μ s, charge	6.25 As
Impulse discharge current (10/350) μ s, specific energy	39 kJ/ Ω
Impulse discharge current (10/350) μ s, peak value I_{imp}	12.5 kA
Short-circuit current rating I_{SCCR}	25 kA
Voltage protection level U_p	≤ 0.4 kV
Residual voltage U_{res}	≤ 0.4 kV (at I_n)
	≤ 0.35 kV (at 10 kA)
	≤ 0.3 kV (at 5 kA)
	≤ 0.275 kV (at 4 kA)
	≤ 0.25 kV (at 3 kA)
TOV behavior at U_T	100 V AC (5 s / withstand mode)
	130 V DC (5 s / withstand mode)
Response time t_A	≤ 25 ns
Max. backup fuse with branch wiring	160 A (gG)

Additional technical data

Maximum discharge current I_{max} (8/20) μ s	65 kA
--	-------

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-40 °C ... 80 °C
Ambient temperature (storage/transport)	-40 °C ... 80 °C
Altitude	≤ 2000 m (amsl (above mean sea level))
Permissible humidity (operation)	5 % ... 95 %

Type 1/2 surge protection plug - VAL-MS-T1/T2 48/12. 5 ST



2801242

<https://www.phoenixcontact.com/us/products/2801242>

Shock (operation)	30g (Half-sine / 11 ms / 3x ±X, ±Y, ±Z)
Vibration (operation)	7.5g (10 ... 500 Hz / 2.5 h / X, Y, Z)

Approval data

UL specifications

Maximum continuous operating voltage MCOV (L+) - (L-)	100 V DC
Short-circuit current rating (SCCR)	5 kA
Voltage protection rating VPR (L+) - (L-)	400 V
Nominal discharge current I_n (L+) - (L-)	20 kA
Mode of protection	(L+) - (L-)
Nominal voltage	60 V DC
SPD Type	1CA

Standards and regulations

Standards/specifications	IEC 61643-11
Standards/specifications	EN 61643-11

Mounting

Mounting type	on base element
---------------	-----------------

Type 1/2 surge protection plug - VAL-MS-T1/T2 48/12. 5 ST



2801242


<https://www.phoenixcontact.com/us/products/2801242>

Drawings

Circuit diagram



Dimensional drawing

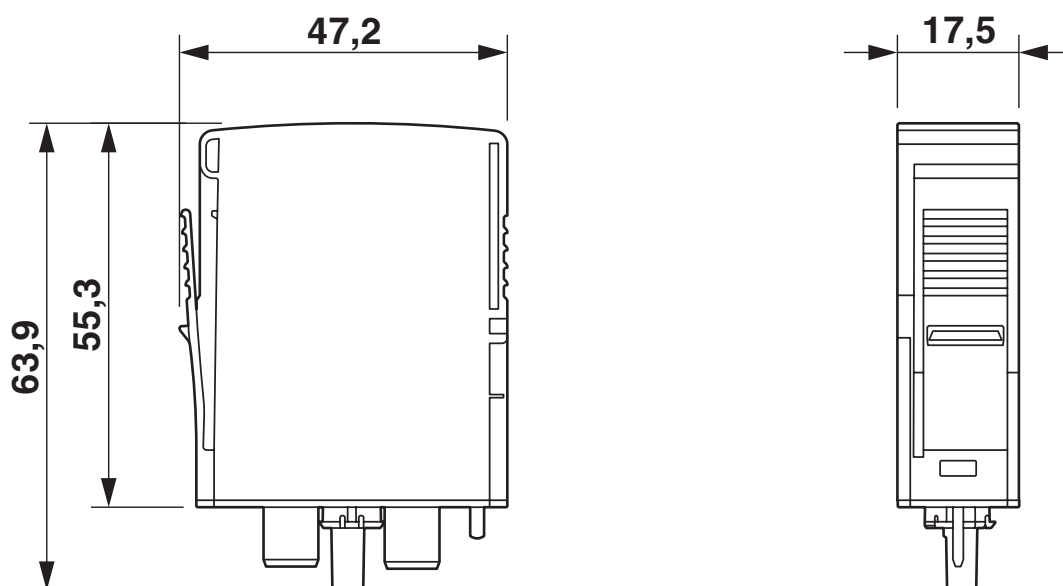

Type 1/2 surge protection plug - VAL-MS-T1/T2 48/12. 5 ST



2801242

<https://www.phoenixcontact.com/us/products/2801242>

Approvals



cUL Recognized
Approval ID: FILE E 330181



UL Recognized
Approval ID: FILE E 330181



IECEE CB Scheme
Approval ID: DE1-51927

CCA

Approval ID: DE1-34244



KEMA-KEUR
Approval ID: 2158241.01



IECEE CB Scheme
Approval ID: DE1-54090



VDE Zeichengenehmigung
Approval ID: 40037097



KEMA-KEUR
Approval ID: 2168290.01

CCA

Approval ID: DE1-34421

cULus Recognized

Type 1/2 surge protection plug - VAL-MS-T1/T2 48/12. 5 ST



2801242
<https://www.phoenixcontact.com/us/products/2801242>

Classifications

ECLASS

ECLASS-9.0	27130890
ECLASS-10.0.1	27130890
ECLASS-11.0	27130890

ETIM

ETIM 8.0	EC002496
----------	----------

UNSPSC

UNSPSC 21.0	39121600
-------------	----------

Type 1/2 surge protection plug - VAL-MS-T1/T2 48/12. 5 ST



2801242
<https://www.phoenixcontact.com/us/products/2801242>

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Type 1/2 surge protection plug - VAL-MS-T1/T2 48/12.5 ST



2801242

<https://www.phoenixcontact.com/us/products/2801242>

Accessories

Wiring bridge

Wiring bridge - MPB 18/1-10/1.0.0 - 2830443

<https://www.phoenixcontact.com/us/products/2830443>



Wiring bridge for modules with connecting pitch 17.5 mm, 1-phase, 10 pitches with contact sequence 1-0-0

Wiring bridge

Wiring bridge - MPB 18/4- 8 - 2809283

<https://www.phoenixcontact.com/us/products/2809283>



Wiring bridge for modules with connecting pitch 17.5 mm, 4-phase, 8-pos.

Type 1/2 surge protection plug - VAL-MS-T1/T2 48/12. 5 ST



2801242


<https://www.phoenixcontact.com/us/products/2801242>

Wiring bridge

Wiring bridge - MPB 18/3- 6 - 2809241

<https://www.phoenixcontact.com/us/products/2809241>

Wiring bridge for modules with connecting pitch 17.5 mm, 3-phase, 6-pos.



Wiring bridge

Wiring bridge - MPB 18/1-57 - 2809238

<https://www.phoenixcontact.com/us/products/2809238>

Wiring bridge for modules with connecting pitch 17.5 mm, 1-phase, 57-pos.



Type 1/2 surge protection plug - VAL-MS-T1/T2 48/12. 5 ST



2801242

<https://www.phoenixcontact.com/us/products/2801242>

Wiring bridge

Wiring bridge - MPB 18/1-12 - 2748593

<https://www.phoenixcontact.com/us/products/2748593>



Wiring bridge for modules with connecting pitch 17.5 mm, 1-phase, 12-pos.

Wiring bridge

Wiring bridge - MPB 18/1- 9 - 2748580

<https://www.phoenixcontact.com/us/products/2748580>



Wiring bridge for modules with connecting pitch 17.5 mm, 1-phase, 9-pos.

Type 1/2 surge protection plug - VAL-MS-T1/T2 48/12. 5 ST



2801242

<https://www.phoenixcontact.com/us/products/2801242>

Wiring bridge

Wiring bridge - MPB 18/1- 8 - 2748577

<https://www.phoenixcontact.com/us/products/2748577>



Wiring bridge for modules with connecting pitch 17.5 mm, 1-phase, 8-pos.

Wiring bridge

Wiring bridge - MPB 18/1- 6 - 2748564

<https://www.phoenixcontact.com/us/products/2748564>



Wiring bridge for modules with connecting pitch 17.5 mm, 1-phase, 6-pos.

Type 1/2 surge protection plug - VAL-MS-T1/T2 48/12. 5 ST



2801242

<https://www.phoenixcontact.com/us/products/2801242>

Wiring bridge

Wiring bridge - MPB 18/1- 4 - 2809225

<https://www.phoenixcontact.com/us/products/2809225>

Wiring bridge for modules with connecting pitch 17.5 mm, 1-phase, 4-pos.



Wiring bridge

Wiring bridge - MPB 18/1- 3 - 2809212

<https://www.phoenixcontact.com/us/products/2809212>

Wiring bridge for modules with connecting pitch 17.5 mm, 1-phase, 3-pos.



Type 1/2 surge protection plug - VAL-MS-T1/T2 48/12. 5 ST



2801242

<https://www.phoenixcontact.com/us/products/2801242>

Wiring bridge

Wiring bridge - MPB 18/1- 2 - 2809209

<https://www.phoenixcontact.com/us/products/2809209>

Wiring bridge for modules with connecting pitch 17.5 mm, 1-phase, 2-pos.



Marker for terminal blocks

Marker for terminal blocks - ZBN 18,LGS:ERDE - 2749589

<https://www.phoenixcontact.com/us/products/2749589>

Marker for terminal blocks, Strip, white, labeled, horizontal: Grounding symbol, mounting type: snapped, for terminal block width: 18 mm, lettering field size: 18 x 5 mm, Number of individual labels: 5



Type 1/2 surge protection plug - VAL-MS-T1/T2 48/12. 5 ST




2801242

<https://www.phoenixcontact.com/us/products/2801242>

Marker for terminal blocks

Marker for terminal blocks - ZBN 18,LGS:L1-N,ERDE - 2749576

<https://www.phoenixcontact.com/us/products/2749576>



Marker for terminal blocks, Strip, white, labeled, horizontal: L1, L2, L3, N, GND, mounting type: snapped, for terminal block width: 18 mm, lettering field size: 18 x 5 mm, Number of individual labels: 5

Zack marker strip

Zack marker strip - ZBN 18:UNBEDRUCKT - 2809128

<https://www.phoenixcontact.com/us/products/2809128>



Zack marker strip, Strip, white, unlabeled, can be labeled with: CMS-P1-PLOTTER, PLOTMARK, mounting type: snapped, for terminal block width: 18 mm, lettering field size: 18 x 5 mm, Number of individual labels: 5

Type 1/2 surge protection plug - VAL-MS-T1/T2 48/12.5 ST



2801242

<https://www.phoenixcontact.com/us/products/2801242>

Marker pen

Marker pen - B-STIFT - 1051993

<https://www.phoenixcontact.com/us/products/1051993>



Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm

Feed-through terminal block

Feed-through terminal block - DK-BIC-35 - 2749880

<https://www.phoenixcontact.com/us/products/2749880>



Feed-through terminal block for VAL and FLT applications

Phoenix Contact 2022 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com